

### Warning!




Be sure to read and fully understand this document before installing, operating, your Stazz product. Failure to do so can result in item failure, property damage, or serious injury. Item failure, injury or property damage due to improper installation is not covered by warranty.

**MAXIMIZE SPACE,  
MINIMIZE EFFORT.**


## STEP 1 - Position the Trousers Rack

Place the trousers rack (A) flush against the top panel inside the cabinet, ensuring it's centered and aligned.  
Use a measuring tape to verify that the cabinet width is at least 700 mm.

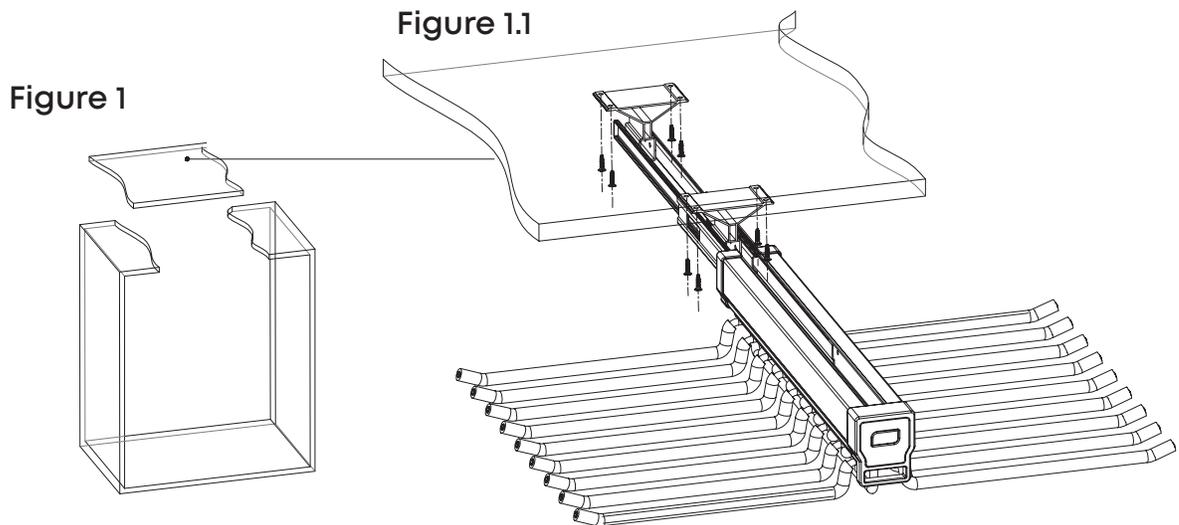

## STEP 2 - Secure the Rack with Screws

Using the provided ST4\*16 flat head screws (B), fasten the trousers rack into place.

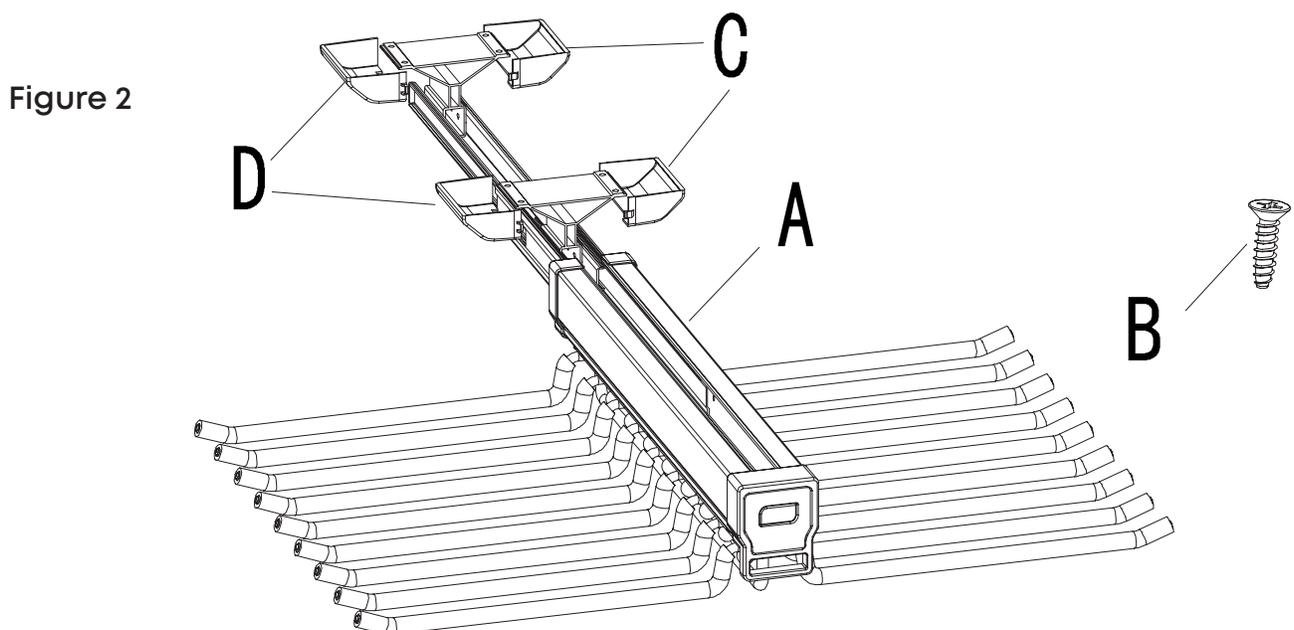

### STEP 3 - Attach Covers and Foam Pads (C & D)

Cover each screw point with a plastic cover (C) for a clean finish.

Affix the foam pads (D) as shown in the diagram — typically placed where the rack may contact the cabinet to reduce noise and wear.

Figure 3

Figure 3.1

